



#### Fully Separable Connectors



## JB Jointing Supplies – 100+ yrs Collective HV experience. Setting the standards higher for cable accessories, Helping you connect the future!







Complete range of IEC 60502 - Fully Separable Connectors.

Suitable For: Copper (Cu)/ Aluminium (Al) Conductors

Suitable For: Cross-linked polyethylene insulation (XLPE) insulated cables & Ethylene propylene rubber (EPR) insulated cables.

Our innovative three size shear bolt design & install rulers with every kit makes for quick and easy installation.

Saving critical time on those critical jobs!





- **Quality IEC Products**
- 5yr Product Warranty
- Experienced Consultancy
- Prompt Service
- 3rd Generation in the HV Industry

- Smooth Installations
- Certified Testing
- Professional Commissioning
- **Competitive Prices**
- **100**<sup>+</sup> Yrs Collective HV Experience



- Branch-off & inline connections in windfarms and distribution grids
- Monitoring and detection of voltage
- Compatible with
  - Screened Elbow Connectors JB-11-SE to JB-33-SE
  - Screened Rear Connectors JB-11-RC to JB-33-RC
  - Surge Arresters JB-11-SA to JB-33-SA
- Fulfils technical requirements:
  - HD.629.1 S2:2006 +A1:2008 Table 7 and short circuit test
  - IP66 test degree of protection with integrated bottom plate
  - -CENELEC standards

EN 50180:2010 and


EN 50181:2010.






#### Key Features

- Branching/Junction point for cross section combinations from 25 to 1000 mm2
- Facilitates safe, quick and easy connection and disconnection of MV cables. cable accessories up to 36 kV
- Full metal encapsulation
- Easy accessibility to the capacitive test points
- Secured against water and dust ingress
- Safe two-point door locking system
- Bushing Interface C1 & C2 (CENELEC standards EN 50180:2010 and EN 50181:2010)

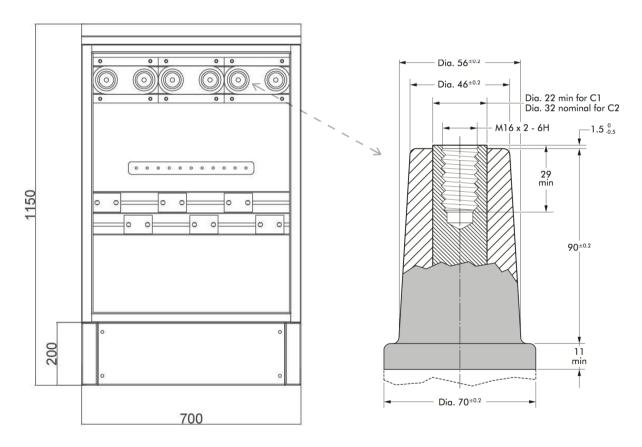



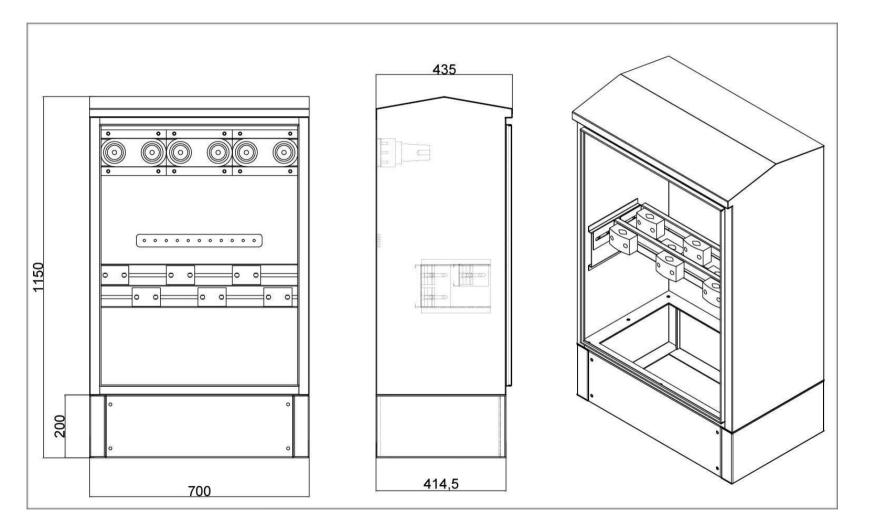

#### Dimensions

Height: 1150 mm

Width: 700 mm

Depth: 435 mm





For more information please call.

+61 447 744 713 Jonathan Viney Director

